



Process Intensification by Membrane-Assisted Reactive Separation Processes: A Design Tool Based On Process Analysis and Optimization

Holtbruegge, Johannes; Babi, Deenesh Kavi; Lutze, Philip ; Gani, Rafiqul; Górak, Andrzej

Publication date:
2012

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Holtbruegge, J., Babi, D. K., Lutze, P., Gani, R., & Górak, A. (2012). *Process Intensification by Membrane-Assisted Reactive Separation Processes: A Design Tool Based On Process Analysis and Optimization*. Abstract from 2012 AIChE Annual Meeting, Pittsburgh. PA, United States.
<https://aiche.confex.com/aiche/2012/webprogram/Paper261965.html>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



[Start](#) | [Grid View](#) | [Browse by Day](#) **OR** [Group/Topical](#) | [Author Index](#) | [Keyword Index](#) | [Personal Scheduler](#)

Process Intensification by Membrane-Assisted Reactive Separation Processes: A Design Tool Based On Process Analysis and Optimization

Wednesday, October 31, 2012: 8:30 AM

Oakmont (Omni)

Johannes Holtbruegge¹, Deenesh K. Babi², Philip Lutze³, Raifqul Gani⁴ and Andrzej Górak¹, (1)TU Dortmund University, Department of Biochemical and Chemical Engineering, Laboratory of Fluid Separations, D-44227 Dortmund, Germany, (2) Technical University of Denmark, CAPEC-Department of Chemical and Biochemical Engineering, DK-2800 Lyngby, Denmark, (3)Department of Biochemical and Chemical Engineering, Laboratory of Fluid Separations, TU Dortmund University, D-44227 Dortmund, Germany, (4)Denmark Technical University, Department of Chemical and Biochemical Engineering, DK-2800 Lyngby, Denmark

Process Intensification by Membrane-Assisted Reactive Separation Processes: A Design Tool based on Process Analysis and Optimization

Johannes Holtbruegge^{a)}, Deenesh K. Babi^{b)}, Philip Lutze^{a)}, Rafiqul Gani^{b)}, Andrzej Górak^{a)}

a) TU Dortmund University, Laboratory of Fluid Separations

Emil-Figge-Strasse 70, D-44227 Dortmund, Germany

Phone: +40 (0) 231 755-2342, E-Mail: johannes.holtbruegge@bci.tu-dortmund.de

b) Technical University of Denmark, Computer Aided Process Engineering Center

Soltofts Plads 229, DK-2800 Kongens Lyngby, Denmark

Due to decreasing fossil fuel reserves, sustainability is an important factor in the chemical industry that has to be considered when new processes are developed. One opportunity to reach higher efficiencies in the production of bulk chemicals is the use of intensified processes. Two promising examples from the field of process intensification are (1) reactive distillation (RD) combining reaction and distillation within one apparatus and (2) hybrid separation processes, for instance the external integration of distillation with membrane separation. In both cases, synergetic effects lead to an increased sustainability in means of economics and ecologics. The use of a multifunctional reactor such as reactive distillation within a hybrid separation process promises even higher benefits. Despite all advantages, the potential of those and other intensified processes is hardly exploited in industry. The main reasons are a lack of process know-how and missing process synthesis tools.

Here, a combined methodology for process intensification is proposed consisting of four integrated blocks which are starting with the general design problem as input followed by "system identification & analysis", a "synthesis/design" and finally a "model-based validation/verification" to identify a near optimal intensified process¹⁾. Whenever and wherever necessary, knowledge from experiments are generated and transferred by the block "experimental validation/verification".

In the "system identification & analysis", the process under investigation is analysed to identify limitations and/or identify critical phenomena which need to be intensified for the targeted performance improvement. Based on these results, criteria are used to identify which workflow(s) is/are followed for "synthesis/design" of the intensified process. The synthesis/design workflows are a knowledge based approach (KBS), a unit-operation based workflow (UBS) and/or phenomena based approach (PBS). While the complexity and the time spent to obtain a solution arises from KBS to PBS, also the novelty and potentially the achieved process improvement increases. The results of the "synthesis/design" which are a small number of potentially promising (intensified) process options are verified in the "model-based validation/verification" to identify the best process option.

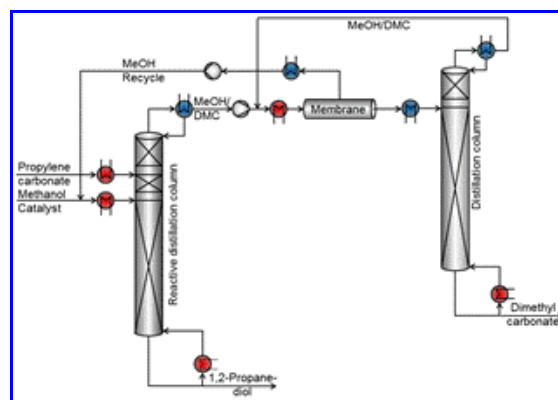


Figure 1: Simplified flowsheet of the developed membrane-assisted reactive separation process

In this contribution, the whole combined methodology will be presented and highlighted through the application to a case study which is the chemical equilibrium-limited transesterification of propylene carbonate with two molecules of methanol to produce the target product dimethyl carbonate and the byproduct 1,2-propanediol. The objective is to minimize the production costs per ton of dimethyl carbonate. Two synthesis/design workflows will be highlighted which are KBS and UBS. It will be shown that the use of the UBS workflow lead to the development of a membrane-assisted reactive separation processes that consists of an RD column, a vapor permeation membrane and a conventional distillation column (see Figure 1). Finally, in the “model-based validation/verification” an evolutionary algorithm based on the “modified differential evolution” approach is used to solve the reduced optimization problem of the remaining process options from the UBS and KBS workflow by determining apparatus dimensions and operating conditions for the minimal objective function. The results for the membrane-assisted reactive separation process compared to the base-case process obtained from KBS for the production of dimethyl carbonate comprises high savings in capital and energy use leading to lower production costs.

References:

1): Lutze, P. et al.: Phenomena-based Process Synthesis and Design to achieve Process Intensification; Proc. 21st European Symposium on Computer Aided Process Engineering – ESCAPE 21, 2011, Greece

Acknowledgements:

The financial support of the German Federal Ministry of Education and Research for the project “Energy Efficiency Management and Benchmarking in the Process Industry” is gratefully acknowledged.

Extended Abstract: File Not Uploaded

See more of this Session: [Advances in Process Intensification](#)
See more of this Group/Topical: [Process Development Division](#)